



LKK Auto Consultants Pte Ltd

51 Ubi Ave 1 #01-25 Paya Ubi Industrial Park, Singapore 408933

TEL: 6256 3561 FAX: 6256 4315

Reg. No: 199607198R GST Reg. No. 19-9607198-R

TAX INVOICE

LONPAC INSURANCE BHD

300 BEACH ROAD
#17-04/07 THE CONCOURSE
SINGAPORE 199555

INV No. AC2502678

INV Date 02/05/2025

Reference CD/LPC24110360/Ama3q2

Code LPC2

PROFESSIONAL SERVICE FEE

Vehicle No. SNQ 4559Z
Insured Veh. XD 4712Y
Claim No. 24/24/24/VC05/030200
Policy No. Z24VC05025013
Accident Date 18/11/2024
Inspection Date 19/11/2024

Description	Total
Third Party Express Settlement	450.00
Subtotal	450.00
GST (9%)	40.50
Grand Total	490.50

We shall be glad if you could forward the payment at your early convenience.

Cheque should be crossed and made payable to **'LKK Auto Consultants Pte Ltd'**

LKK Auto Consultants Pte Ltd

LKM



LKK Auto Consultants Pte Ltd

51 Ubi Ave 1 #01-25 Paya Ubi Industrial Park, Singapore 408933

TEL: 6256 3561 FAX: 6256 4315

Reg. No: 199607198R GST Reg. No. 19-9607198-R

Affiliated to Federation Internationale Des Experts En Automobile				
LONPAC INSURANCE BHD 300 BEACH ROAD #17-04/07 THE CONCOURSE SINGAPORE 199555			Ref: CD/LPC24110360/Ama3q2(N)	
			Date: 02/05/2025	
			Code: LPC2	
1. Policy Particulars :- THIRD PARTY CLAIM				
	Insured Veh.	XD 4712Y	Veh. Inspected	SNQ 4559Z
	Policy No.	Z24VC05025013	Coverage (\$)	0.00
	Claim No.	24/24/24/VC05/030200	Excess (\$)	0.00
	Assign From	ERIC	Assign Date	19/11/2024
2. Vehicle Particulars & Condition				
	Make & Model	MERCEDES BENZ A200	c.c	1332
	Engine No.	HIDDEN	Year of Reg.	2019
	Chassis No.	WDD1770872J024238	Colour	BLACK
	Odometer	135820 KM	Steering	IN ORDER
	Brakes	IN ORDER	Modification	SPORTS RIM
	General	GOOD		
3. Conditions of Tyres				
		Size	Make	Balance
	R/H Front Tyre	225/45 R18	PIRELLI	6 mm
	L/H Front Tyre	225/45 R18	PIRELLI	6 mm
	R/H Rear Tyre	225/45 R18	PIRELLI	6 mm
	L/H Rear Tyre	225/45 R18	PIRELLI	6 mm
4. Description of Damages				
	THE VEHICLE SUSTAINED DAMAGES AT THE REAR O/S PORTION. DAMAGES SEE DETAILS.			
5. General Information				
	Accident Date	18/11/2024	Inspection Date	19/11/2024
	Survey held at	MODERN AUTOMOTIVE PTE LTD BLK 3023A UBI ROAD 1 #01-61 SINGAPORE 408717		
5a. Remarks				
	A) THE INSPECTION WAS CONDUCTED ON A "WITHOUT PREJUDICE" BASIS. B) IN ACCORDANCE TO YOUR INSTRUCTIONS, WE HAVE NOT AUTHORISED REPAIRS.			
5b. Estimate Days of Repair				
	ESTIMATED NORMAL PERIOD FOR REPAIR:		7 Working Days	



LKK Auto Consultants Pte Ltd

51 Ubi Ave 1 #01-25 Paya Ubi Industrial Park, Singapore 408933

TEL: 6256 3561 FAX: 6256 4315

Reg. No: 199607198R GST Reg. No. 19-9607198-R

Page No.:1 of 2

ADJUSTMENT ON REPAIR COST FOR VEHICLE NO. SNQ 4559Z

Qty	Description of Parts	Condition	Estimate By Workshop (\$)	Our Adjusted (\$)
	<u>REPLACEMENT OF PARTS</u>			
1	REAR BUMPER	TORN	1,770.00	1,770.00
1	REAR BUMPER SIDE HOLDER RH	NOT NECESSARY	145.00	-
1	REAR BUMPER REFLECTOR RH	NOT NECESSARY	96.00	-
2	REAR BUMPER SENSOR	NOT NECESSARY	510.00	-
4	REAR BUMPER SENSOR HOLDER	NECESSARY	100.00	100.00
1	TAIL LAMP RH	CRACKED	786.00	786.00
1	TAIL LAMP PANEL RH	DENTED	245.00	245.00
1	REAR FENDER RH	DISTORTED	2,623.00	2,623.00
1	REAR FENDER INNER SHIELD -RH	TORN	214.00	214.00
1	REAR FENDER AIR VENT	NOT NECESSARY	65.00	-
1	REAR DOOR -RH	DENTED	2,588.00	2,588.00
1	REAR DOOR LOCK RH	NOT NECESSARY	298.00	-
1	REAR DOOR WEATHERSTRIP RH	NECESSARY	318.00	318.00
1	REAR WHEEL RIM RH	NOT NECESSARY	1,310.00	-
1	REAR UPPER ARM	NOT NECESSARY	571.00	-
1	REAR LOWER ARM	NOT NECESSARY	835.00	-
1	REAR KNUCKLE ARM	NOT NECESSARY	1,315.00	-
1	REAR CONTROL ARM	NOT NECESSARY	219.00	-
1	REAR WHEEL HUB C/W BEARING	NOT NECESSARY	599.00	-
1	REAR SHOCK ABSORBER	NOT NECESSARY	636.00	-
	LESS 10% DISCOUNT		-1,524.30	-864.40
			13,718.70	7,779.60
	<u>SPECIAL NETT ITEMS</u>			
1	SET REAR BUMPER CLIPS (SN)	NECESSARY	50.00	50.00
1	SET REAR FENDER INNER SHIELD CLIPS (SN)	NECESSARY	30.00	30.00
1	SET REAR FENDER SEALANT (SN)	NECESSARY	60.00	60.00
1	REAR TYRE (SN)	CUT	350.00	200.00
			490.00	340.00

Report Ref No. CD/LPC24110360/Ama3q2(N)



LKK Auto Consultants Pte Ltd

51 Ubi Ave 1 #01-25 Paya Ubi Industrial Park, Singapore 408933

TEL: 6256 3561 FAX: 6256 4315

Reg. No: 199607198R GST Reg. No. 19-9607198-R

Page No.:2 of 2

Qty	Description of Parts	Condition	Estimate By Workshop (\$)	Our Adjusted (\$)
	LABOUR			
	TO KNOCKING & PULL OUT REAR PORTION & RENEW ABOVE PARTS.		1,200.00	1,000.00
	TO PUTTY & SPRAY UP PAINT WORKS.		1,000.00	700.00
	TO CHECK WIRING SYSTEM.		50.00	30.00
	TO SPRAY TUFF COAT.		150.00	80.00
	TO REMOVE REVERSE SENSOR .		100.00	50.00
	TO TRANSFER REAR DOOR FITTINGS .		150.00	80.00
	TO REMOVE UPHOLSTERY .		150.00	80.00
	TO DISMANTLE REAR UNDERCARRIAGE.	NOT NECESSARY	350.00	-
	TO PERFORM WHEEL ALIGNMENT.		150.00	80.00
	TO PERFORM DIAGNOSTIC TEST .		200.00	150.00
			3,500.00	2,250.00
	GRAND TOTAL		17,708.70	10,369.60
	RECOMMENDED COST OF LUMP SUM REPAIRS (TO ITS PRE-ACCIDENT CONDITION)			8,300.00

Report Ref No. CD/LPC24110360/Ama3q2(N)

ADRIAN LING WAI PING

B.Eng,AMSOE,AMIRTE,AMSAE-A,M.MATAI

Licensed Appraiser

DISCLAIMER OF LIABILITY TO THIRD PARTIES:- This Report is made solely for the use and benefit of the Client named on the front page of this Report.

No liability of responsibility whatsoever, in contract or tort, is accepted to any third party who may rely on the Report wholly or in part. Any third party acting or relying on this Report, in whole or in part, does so at his or her own risk.


PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z

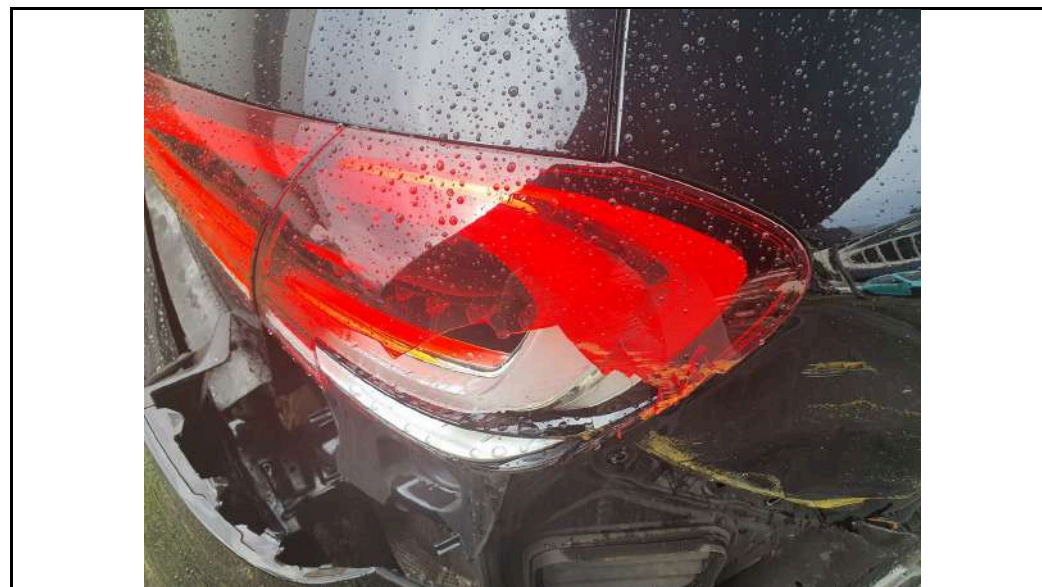

PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z





PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z





PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z



PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z

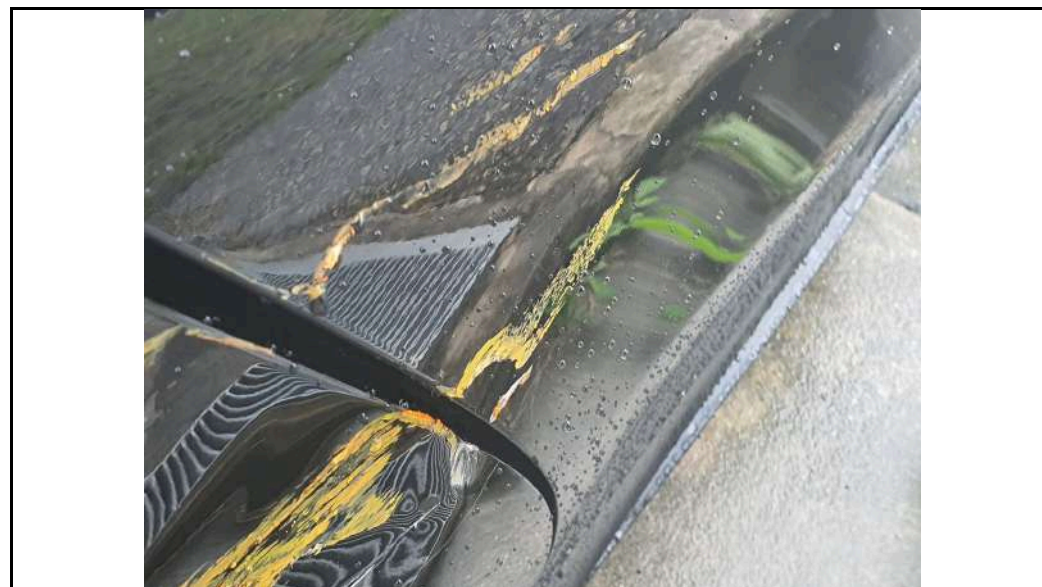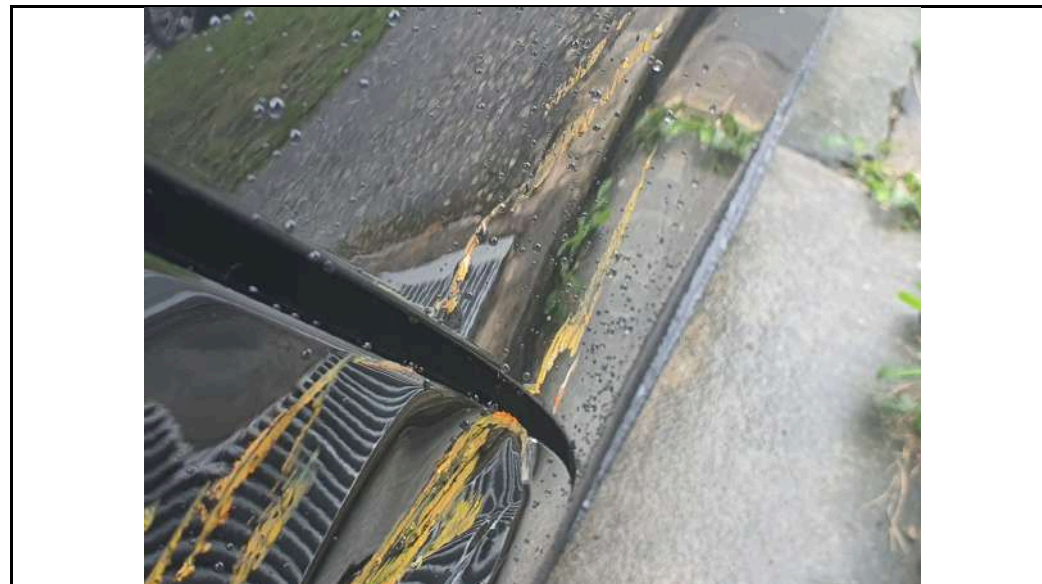

PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z

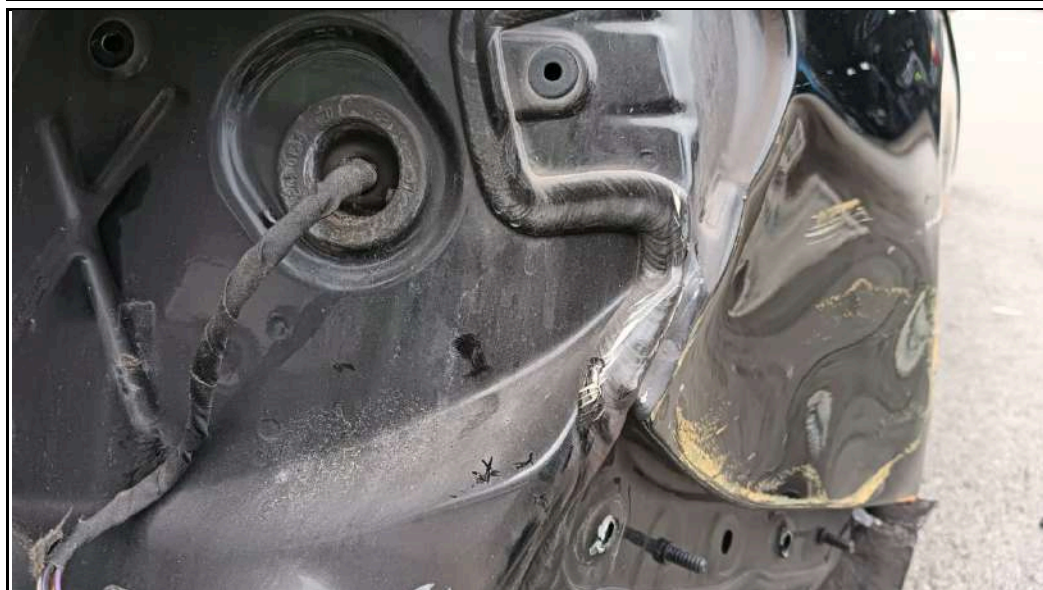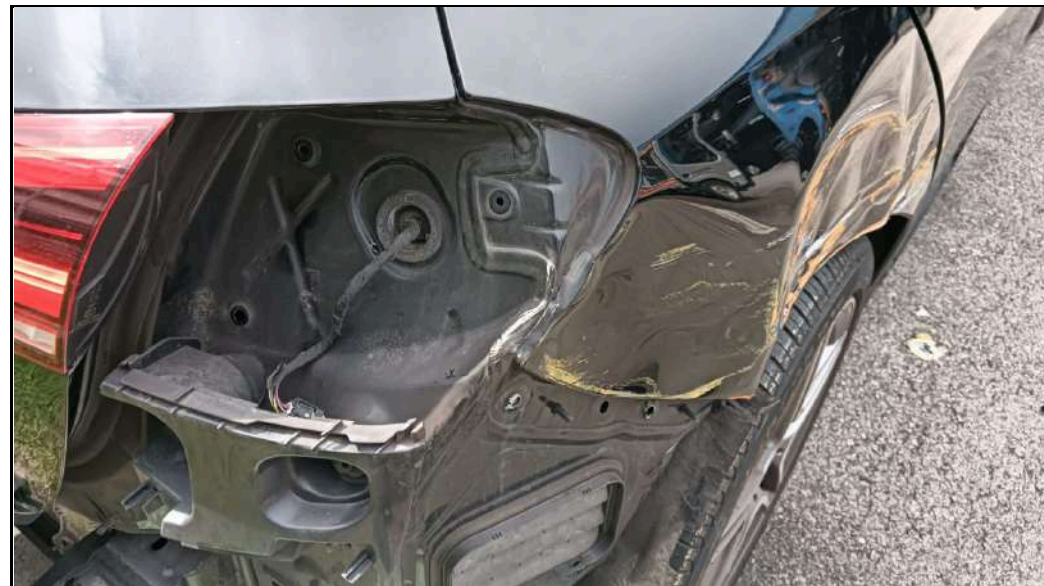

PHOTOGRAPHS FOR VEHICLE NO. : SNQ 4559Z

