

Precise Appraiser Pte Ltd

Reg no. 201924041Z

Invoice

To: Ride Now Pte Ltd

Invoice No: 2020/INV/0095

CC: TCRP Pte Ltd

Your Reference:

1 Bukit Batok Crescent #04-47

Our Reference: 2020/0113

WCEGA Plaza

Date: 14/7/2020

Singapore 658064

Description	Amount S\$
<u>Particulars</u>	
Vehicle No: SGR5244C	
Accident Date: 27/6/2020	
Date of Inspection: 30/6/2020	
<u>Service:</u>	
Assessment with report (inclusive of photographs and transport charges etc)	\$638
Total Amount:	\$638

Payment Details:

- 1) Cheque: Kindly make all cheques crossed and payable to **PRECISE APPRAISER PTE LTD**
- 2) Online Banking: **Maybank 041-9107653-9**



Precise Appraiser Pte Ltd

To: Ride Now Pte Ltd

CC: TCRP Pte Ltd

1 Bukit Batok Crescent #04-47

WCEGA Plaza

Singapore 658064

REFERENCES

Ref No	: 2020/0113	Date of Report	: 30/6/2020
Claim Type	: Third Party	Date of Request	: 30/6/2020
Third party vehicle	: SGR5244C	Date of Accident	: 27/6/2020
Insured Vehicle	:	Date of Inspection	: 30/6/2020
Your Reference No	: -		

DAMAGED VEHICAL PARTICULARS

Registration Plate No	: SGR5244C	Engine Modification	: NIL
Model / Make	: Toyota Rush	Pre-accident damage	: NIL
Colour	: Black	General Condition	: Good
Manufacturing Year	: 2006	General Paint Work	: Good
Engine No	: 3SZ1702622	Steering	: Serviceable
Engine Capacity	: 1500 cc	Handbrake	: Serviceable
Chassis No	: J200E0009281	Footbrake	: Serviceable
Odometer No	: 199556		
Transmission	: Auto		

TYRES CONDITION

Front Right		Rear Left	
Make	: Triangle	Make	: Triangle
Size	: 215/60 r16 4	Size	: 215/60 r16 4
Front Left		Rear Right	
Make	: Triangle	Make	: Triangle
Size	: 215/60 r16 4	Size	: 215/60 r16 4

The above millimetres represent the remaining life of tyre treads

VEHICAL REPAIR COST

<u>Descriptions</u>	<u>Repairer (\$\$)</u>	<u>Difference (\$\$)</u>	<u>Adjuster (\$\$)</u>
Parts	5,565.95		3,863.75
Labour	2,920.00		2,180.00
Calculated Cost (\$\$) :	8,485.95	2,442.20	6,043.75


Recommended Lump Sum Repair Cost (\$\$)	: 4,850.00
Estimate Repair Duration	: 7
Survey Inspection At	: TCRP Pte Ltd
Survey Inspection Address	: 1 Bukit Batok Crescent #04-47 WCEGA Plaza Singapore 658064

DESCRIPTION OF DAMAGE

At the time of inspection, this vehicle sustained damages to the **Front Rh portion**.

Front bumper, bonnet, front rh fender, support panel, front rh wheel housing dented. Front rh sport rim grazed, front rh undercarriage push in etc.

Please see attached scheduled details.

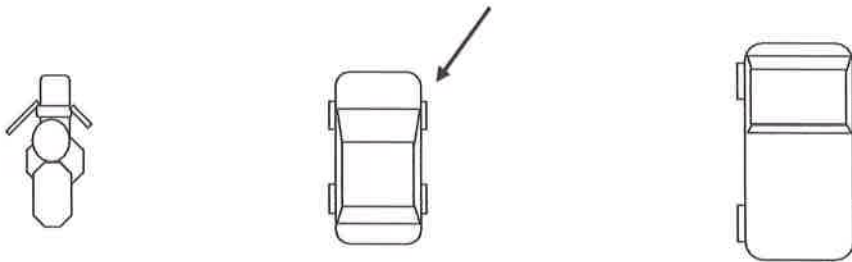

SPECIAL REMARKS

We have not authorised repair. Under normal circumstances, estimated 7 working days are required to repair the vehicle.

We are pleased to advise that the inspection work was carried out accordingly, and hereby submit our Inspection Report and photographs.

The block contains a handwritten signature in blue ink that reads 'Anthony'. To the right of the signature is a circular blue stamp. The stamp has 'PRECISE APPRAISER PTE LTD' written around the perimeter and a star in the center.

Anthony
Automotive Appraiser
MSAAA

Disclaimer:

This survey was conducted by Precise Appraiser Pte Ltd without prejudice basis and we do not authorized repair. Report by Precise Appraiser Pte Ltd is deemed as confidential and provided for the use of clients and appointed agent. *We have inspected thoroughly each and every item on the repairer's estimate against the actual damages found on the vehicle.* All findings and recommendations are listed accordingly and final decision of settlement to your good selves parts thereof accordingly and final. No liability shall be attached to Precise Appraiser Pte Ltd therefore.

Our Reference : 2020/0113

Your Reference:

Vehicle Number : SGR5244C

S/N	Qty	Description	Condition	Repairer Estimate (\$\$)	Our Assessment (\$\$)
Parts					
1	1pcs	Front bumper	Dented	725.00	725.00
2	2pcs	Front bumper side retainer @50/pcs	Torn	100.00	100.00
3	1pcs	Front rh fender	Dented	385.00	385.00
4	1pcs	Front rh fender inner shield	Torn	254.00	254.00
5	1pcs	Bonnet	Repair	1,375.00	-
6	1pcs	Bonnet inner lock	Serviceable	75.60	-
7	1pcs	Bonnet inner seal	Serviceable	95.00	-
8	2pcs	Rh headlamp	Holder torn	1,515.00	1,515.00
9	1pcs	Support panel	Repair	684.00	-
10	1pcs	Front shock absorber	Bent	365.00	365.00
11	1pcs	Front knuckle arm	Bent	535.00	535.00
12	1pcs	Front knuckle arm bearing	Necessary	120.00	120.00
13	1pcs	Front lower arm	Bent	486.00	486.00
Total				6,714.60	4,485.00
Less 25%				1,678.65	1,121.25
Parts Sub Total				5,035.95	3,363.75

Special Nett

14	1pcs	Front Rh sport rim	Grazed	450.00	450.00
15	1sets	Front bumper clips	Necessary	80.00	50.00
Total				530.00	500.00

Labour					
1		Towing		100.00	100.00
2		To check wiring sytsem.		50.00	40.00
3		To reprogramme after the accident repair works .		150.00	120.00
4		To r&r condenser and re charge air con gas.		120.00	100.00
5		To conduct alignment.		100.00	80.00
6		To r&r front rh undercarriage.		300.00	200.00
7		To cut and weild on support panel. To panel beat on front rh wheel housing. To r&r front bumper, bonnet, headlamp and others attachments.		1,000.00	700.00
8		To respray on front bumper, front both fender, front both wheel housing, bonnet, front rh door and accident affected area.		1,000.00	800.00
9		To carry out body cavity preservation		100.00	40.00
Labour Total				2,920.00	2,180.00

	Sub Total (labour and parts)	8,485.95	6,043.75
--	-------------------------------------	----------	----------

Adjustment / Recommendations

Note: For Lump Sum Repair

The workshop has agreed to undertake the repair on a Lump Sum Basis, and/or use of ex-stock/reconditioned parts whichever is possible (having taken into consideration to repair instead of replacements).

The final adjusted Lump Sum contract amount is **S\$4,850**.

Under normal circumstances, the repair period would be about 7 working days.



UEN: 53389200K

TEAM TOWING SERVICES

Hotline: 9382 2269 Email: kenjikwa@gmail.com

CASH SALE / WORK ORDER

Messrs: Open
Vehicle No: SR 5244C Model No: Toy Rush
Time (day / night): Y&N Contact No: 9382 2269
Location: WATERLOO RD
To: WONG PLAZA #04-14
Cash \$: 100 Others: la sum
Authorised by: la sum

Note: Vehicle is towed at owner's risk. The company accepts no responsibility for damages or other misdeemeanour to your vehicle whilst being towed.

No. 103314

Date: 27/6/20

- ☐ Jump Start / Changing of Battery
- ☐ Tyre Replacement
- ☒ Accident / Breakdown
- ☐ Multi / Basement
- ☐ With Load / Cargo Box
- ☒ King Dolly
- ☐ Transport Charge
- ☐ Low Body Kit
- ☐ Door Opening Service
- ☐ Crane Up / Winch Out
- ☐ Collect Doc / Key
- ☐ Repo
- ☐ Woodlands and Tuas Checkpoint

LI HONG AUTO SERVICES PTE LTD

NO.1 BUKIT BATOK CRESCENT

#02-32 WCEGA PLAZA

SINGAPORE 658064

Phone Number: 65700079 / 90276341

Fax Number:

Customer:		Date:	6/29/2020 4:11 PM
Company:		VIN	
License NO:	SGR 5244 C	Technician:	T
Odometer:		Order NO:	

VEHICLE ALIGNMENT REPORT

TOYOTA, RUSH, 06-11, J200/210E (2WD/4WD,LOWDOWN)

Primary Angles			Initial	Specifications		Final
				Min.	Max.	
Front	Caster	Left	---	3°53'	5°53'	---
		Right	---	3°53'	5°53'	---
	Camber	Left	-0°36'	-0°33'	0°57'	-0°36'
		Right	-0°06'	-0°33'	0°57'	-0°06'
	Toe	Left	3.4mm	-0.5mm	0.5mm	3.4mm
		Right	15.8mm	-0.5mm	0.5mm	15.8mm
Rear	Camber	Left				
		Right				
	Toe	Left				
		Right				
Thrust Angle						
Secondary Angles			Initial	Specifications		Final
				Min.	Max.	
SAI		Left	---	12°52'	12°52'	---
		Right	---	12°52'	12°52'	---
Included Angle		Left	---	---	---	---
		Right	---	---	---	---
Toe Out On Turns		Left				
		Right				
Max Turn Inside		Left	---	---	---	---
		Right	---	---	---	---
Toe Curve Change		Left				
		Right				
Setback		Front				
		Rear				
Track Width Diff.						
Wheel Base Diff.						
Front Ride Height		Left				
		Right				
Rear Ride Height		Left				
		Right				
Frame Angle						


THANK YOU FOR YOUR SUPPORT

Our Ref: 2020/0113
Vehicle No.: SGR5244C

INSPECTION PHOTOS



INSPECTION PHOTOS

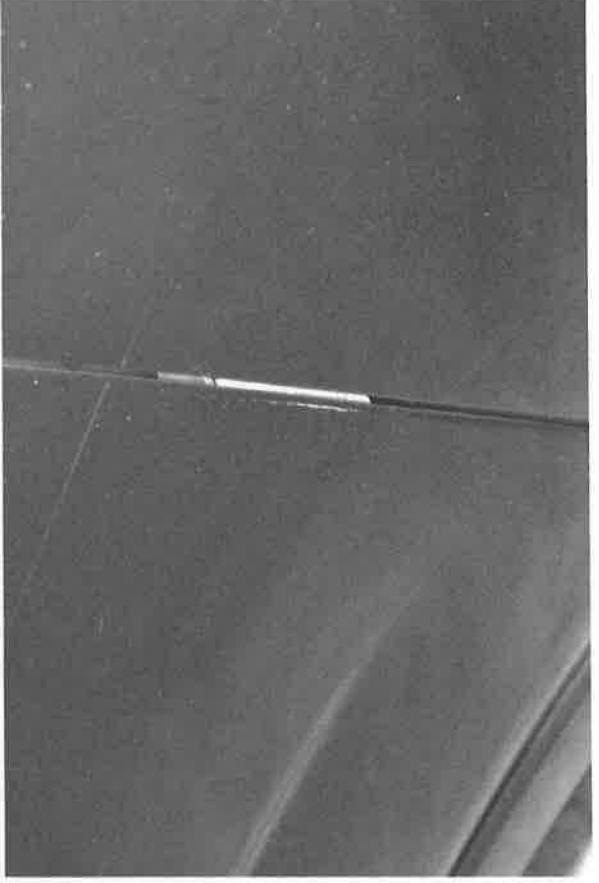


INSPECTION PHOTOS



INSPECTION PHOTOS





INSPECTION PHOTOS

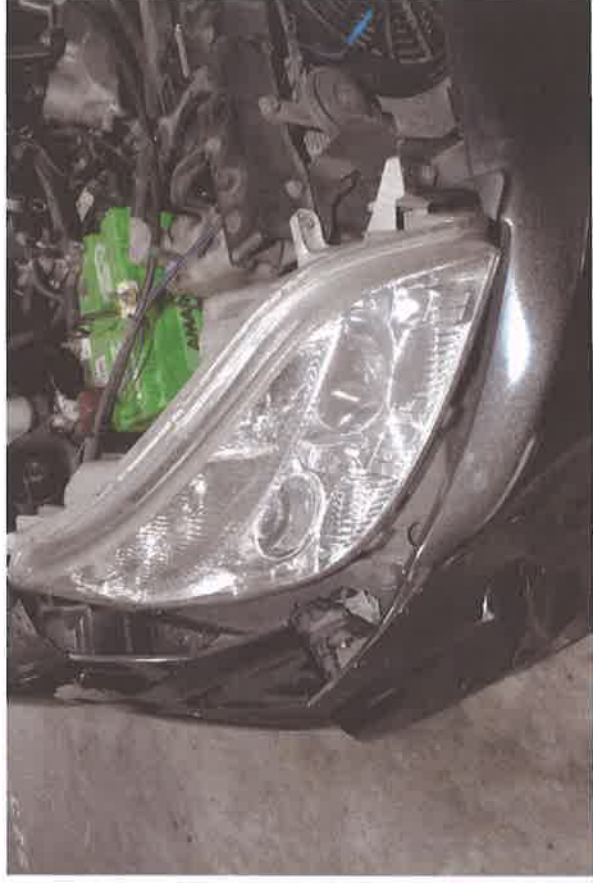

INSPECTION PHOTOS





INSPECTION PHOTOS

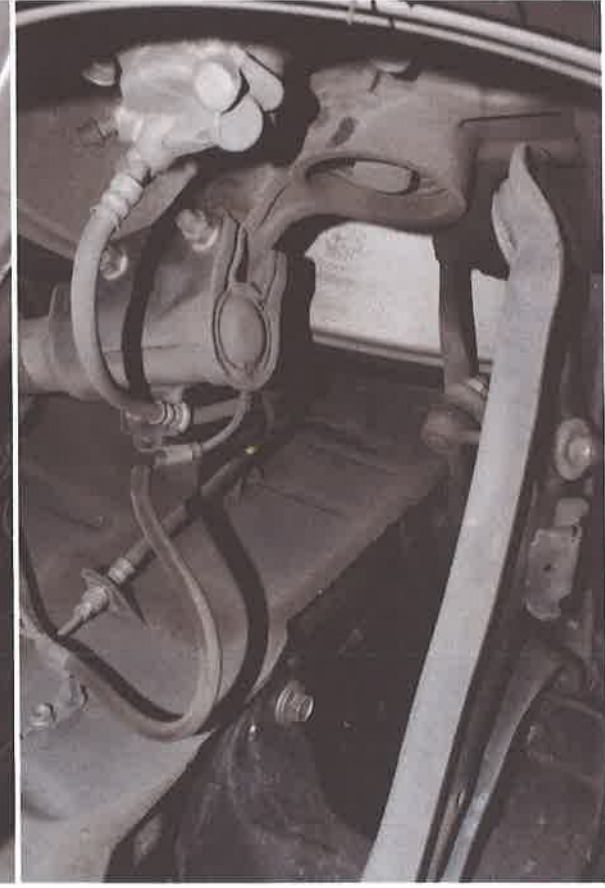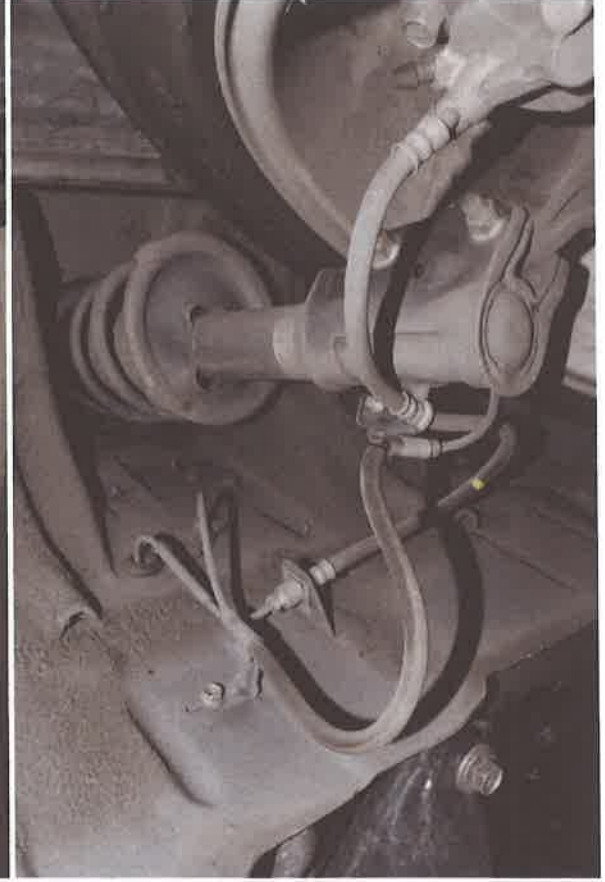

INSPECTION PHOTOS



RE-INSPECTION PHOTOS

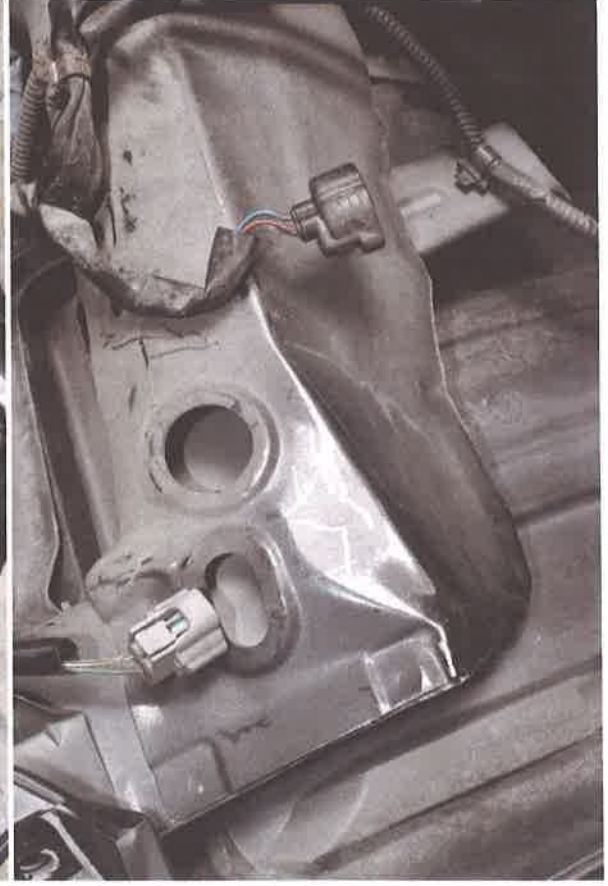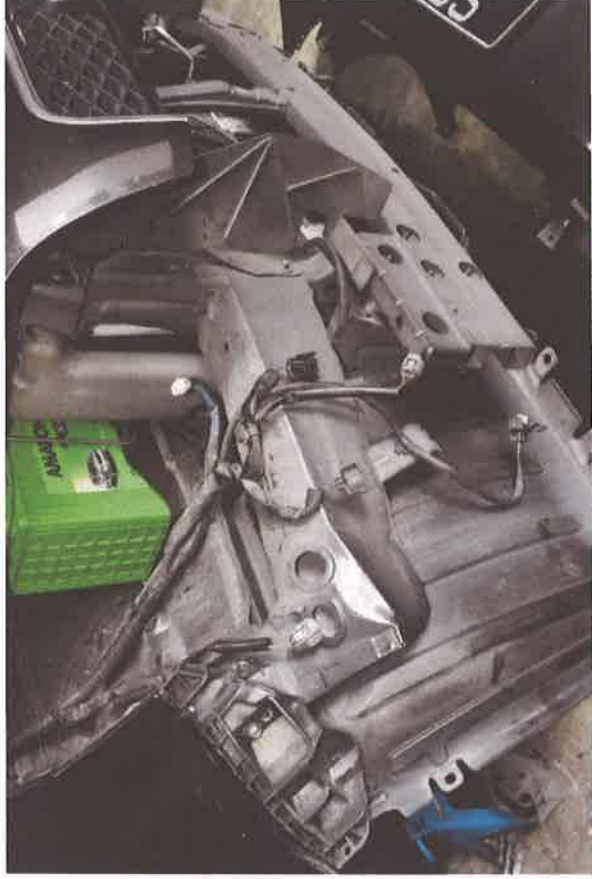


RE-INSPECTION PHOTOS



RE-INSPECTION PHOTOS



RE-INSPECTION PHOTOS

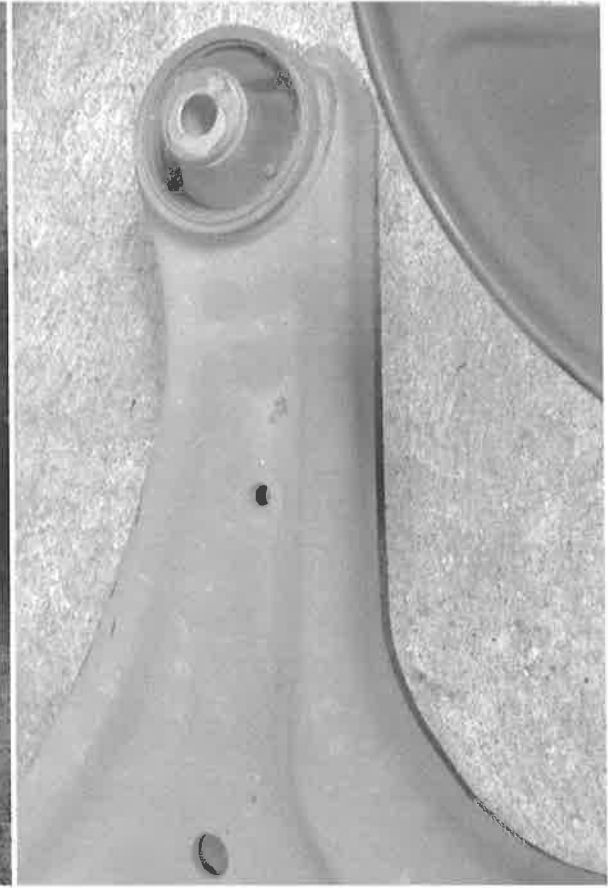

Our Ref: 2020/0113
Vehicle No.: SGR5244C

RE-INSPECTION PHOTOS



RE-INSPECTION PHOTOS



Our Ref: 2020/0113
Vehicle No.: SGR5244C

RE-INSPECTION PHOTOS

